

DAS 4630
Slimline cooker hood
with intuitive SmartControl controls



- Elegant design – obsidian black control panel, 60 cm wide
- Unique user convenience – Con@ctivity
- LED strip for uniform lighting
- Efficient filtration- 10-ply stainless-steel grease filter
- Recirculation mode – Active AirClean or Longlife AirClean filter



EAN: 4002516496151 / Material number: 11878210 /
Old Material Number: 28S4630BGB

Construction type	
Slimline cooker hood	•
Operating modes	
Type of air guide	Can be retrofitted
Recirculation conversion kit (order separately)	DUU 151, DUU 150
Active charcoal filter (order separately)	DKFS 31-P, DKFS 31-R
Design	
Colour	Obsidian black
User convenience	
Miele@home	•
Automatic function Con@ctivity	•
Electronic controls	•
Touch-on-glass controls	•
Booster levels	1
Run-on time 5/15 min.	•
Grease filter saturation indicator	•
Active charcoal filter saturation indicator	•
Efficiency and sustainability	
Energy efficiency class (A+++ – D)	A+++
ECO motor	•
ECO motor (DC motor)	•
PowerManagement system	•
Annual energy consumption in kWh/year	23.5
Fluid dynamic efficiency class	A
Lighting efficiency class	A
Grease filtering efficiency class	A
Cleaning and care	
Easy-to-clean canopy interior – CleanCover	•
Filter system	
Number of dishwasher-safe stainless steel grease filters (10-ply)	1
Lighting	
Number x W	1 x 3 W
Light intensity in lx	330 lx
Colour temperature in K	3500 Kelvin
Dimmer function	•
Fan	
Dual-action blower	•
Exhaust air	
Air throughput in Level 1 (m ³ /h) according to EN 61591	180
Air throughput in Level 2 (m ³ /h) according to EN 61591	280
Air throughput in Level 3 (m ³ /h) according to EN 61591	400
Air throughput in Booster level 1 (m ³ /h) according to EN 61591	600
Air throughput in Booster level 2 (m ³ /h) according to EN 61591	720
Sound power in Level 1 (dB(A) re 1 pW) according to EN 60704-3	38.0

DAS 4630
Slimline cooker hood
with intuitive SmartControl controls



EAN: 4002516496151 / Material number: 11878210 /
Old Material Number: 28S4630BGB

Sound power in Level 2 (dB(A) re 1 pW) according to EN 60704-3	48.0
Sound power in Level 3 (dB(A) re 1 pW) according to EN 60704-3	56.0
Sound power in Booster level 1 (dB(A) re 1 pW) acc. to EN 60704-3	66.0
Sound power in Booster level 2 (dB(A) re 1 pW) acc. to EN 60704-3	70.0
Sound pressure in Level 1 (dB(A) re 20 µPa) according to EN 60704-2-13	25.0
Sound pressure in Level 2 (dB(A) re 20 µPa) according to EN 60704-2-13	34.0
Sound pressure in Level 3 (dB(A) re 20 µPa) according to EN 60704-2-13	42.0
Sound pressure in Booster level 1 (dB(A) re 20 µPa) acc. to EN 60704-2-13	53.0
Sound pressure in Booster level 2 (dB(A) re 20 µPa) acc. to EN 60704-2-13	57.0
Recirculation	
Air throughput in Level 1 (m ³ /h) according to EN 61591	165
Air throughput in Level 2 (m ³ /h) according to EN 61591	265
Air throughput in Level 3 (m ³ /h) according to EN 61591	380
Air throughput in Booster level 1 (m ³ /h) according to EN 61591	585
Air throughput in Booster level 2 (m ³ /h) according to EN 61591	695
Sound power in Level 1 (dB(A) re 1 pW) according to EN 60704-3	43.0
Sound power in Level 2 (dB(A) re 1 pW) according to EN 60704-3	53.0
Sound power in Level 3 (dB(A) re 1 pW) according to EN 60704-3	62.0
Sound power in Booster level 1 (dB(A) re 1 pW) acc. to EN 60704-3	72.0
Sound power in Booster level 2 (dB(A) re 1 pW) acc. to EN 60704-3	77.0
Sound pressure in Level 2 (dB(A) re 20 µPa) according to EN 60704-2-13	40.0
Sound pressure in Level 3 (dB(A) re 20 µPa) according to EN 60704-2-13	48.0
Sound pressure in Booster level 1 (dB(A) re 20 µPa) acc. to EN 60704-2-13	59.0
Sound pressure in Booster level 2 (dB(A) re 20 µPa) acc. to EN 60704-2-13	63.0
Sound pressure in Level 1 (dB(A) re 20 µPa) according to EN 60704-2-13	29.0
Safety	
Safety switch-off	•
Single-ply safety glass (ESG)	•
Technical data	
Canopy width in mm	596
Canopy height in mm	36


DAS 4630
Slimline cooker hood
with intuitive SmartControl controls



EAN: 4002516496151 / Material number: 11878210 /
Old Material Number: 28S4630BGB

Canopy depth in mm	273
Net weight in kg	12.0
Length of supply lead in m	1.5
Standard plug fitted	•
Minimum height above electric hobs in mm	450
Minimum safety distance above gas hobs (max. 12.6 kW total power, burner ≤ 4.5 kW) in mm	650
Number of phases	1
Total rated load in kW	0.16
Voltage in V	230
Fuse rating in A	10
Frequency in Hz	50
Installation notes	
Extraction ducting connection at top	•
Diameter of exhaust duct in mm	150
Accessories included	
Non-return flap	•

DAS 4630
Slimline cooker hood
with intuitive SmartControl controls

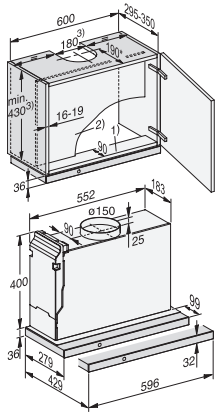

DAS4630, DAS4631, Installation drawings

1) The front section of the wall unit must be fitted with a base panel to secure the cooker hood. If the appliance is fitted further back, e.g. to accommodate a front panel, then the shelf depth should be deeper accordingly. 2) If a partition wall is to be provided in the unit, it must be removable. 3) Extraction, recirculation with conversion kit DUU 150. * In this installation situation, the deflector plate is flush with the front edge of the housing unit carcass. , If you wish to position the cooker hood further forward or further back, dimensions have to be adapted accordingly. , Extraction: the height of the wall unit and the cut-out dimensions must take into account any accessories fitted, e.g. silencer, recirculation hood conversion kit).