

DA 2390

Extractor unit

with energy-efficient LED lighting and light-touch switches for easy use.



- Customised kitchen design - fully integrated in 884mm width
- Space saving - suitable for narrow wall units over 30 cm deep
- Powerful - 600m³/h on the booster setting
- Efficient filtration- 10-ply stainless-steel grease filter
- Safe and easy to clean - Miele CleanCover

EAN: 4002515778302 / article number: 28239055D / material number: 10451560

Construction type	
Integrated extractor	•
Design	
Colour	No colour
RAL colours available as customisation on request	•
Customisation possible on request	•
Operating modes	
Type of air guide	Convertible
Active charcoal filter (order separately)	DKF19-1
User convenience	
Electronic controls	•
Light-touch controls	•
Power levels (number without Booster level)	3
Booster level	•
Cleaning convenience	
CleanCover	•
Efficiency and sustainability	
Annual energy consumption in kWh/year	55,3
Filter system	
Number of dishwasher-safe stainless steel grease filters	2
Lighting	
LED	•
Number x W	4 x 3 W
Light intensity in Lx	500
Colour temperature in K	3.000
Fan	
Dual-action fan	•
AC motor	•
Air throughput with max. duct diameter in extraction mode (not for external version)	
Air throughput in Level 1 (m ³ /h)	250
Air throughput in Level 2 (m ³ /h)	300
Air throughput in Level 3 (m ³ /h)	360
Air throughput in Booster level (m ³ /h)	600
Sound power in Level 1 (dB(A) re 1 pW)	47
Sound power in Level 2 (dB(A) re 1 pW)	48
Sound power in Level 3 (dB(A) re 1 pW)	52
Sound power in Booster level (dB(A) re 1 pW)	64
Sound pressure in Level 1 (dB(A) re 20 µPa)	31
Sound pressure in Level 2 (dB(A) re 20 µPa)	34
Sound pressure in Level 3 (dB(A) re 20 µPa)	38
Sound pressure in Booster level (dB(A) re 20 µPa)	50

DA 2390

Extractor unit

with energy-efficient LED lighting and light-touch switches for easy use.




Air throughput in recirculation mode	
Air throughput in Level 1 (m³/h)	190
Air throughput in Level 2 (m³/h)	250
Air throughput in Level 3 (m³/h)	320
Air throughput in Booster level (m³/h)	500
Sound power in Level 1 (dB(A) re 1 pW)	54
Sound power in Level 2 (dB(A) re 1 pW)	60
Sound power in Level 3 (dB(A) re 1 pW)	64
Sound power in Booster level (dB(A) re 1 pW)	72
Sound pressure in Level 1 (dB(A) re 20 µPa)	39
Sound pressure in Level 2 (dB(A) re 20 µPa)	45
Sound pressure in Level 3 (dB(A) re 20 µPa)	49
Sound power in Booster level (dB(A) re 1 pW)	57
Safety	
Safety switch-off	•
Technical data	
Canopy width in mm	884
Canopy height in mm	63
Canopy depth in mm	297
Minimum height above electric hobs in mm	450
Minimum height above gas hobs (max. 12.6 kW total power, burner ≤ 4.5 kW) in mm	650
Net weight in kg	13,0
Length of supply lead in m	1,5
Standard plug fitted	•
Total rated load in kW	0,23
Voltage in V	230
Fuse rating in A	10
Frequency in Hz	50
Number of phases	1
Installation notes	
Extraction ducting connection at top	•
Extraction connection at top and rear	•
Diameter of extraction ducting connection in mm	150
Standard accessories	
Non-return flap	•
Adapter to reduce ducting diameter from 150 mm to 125 mm Ø	•

DA 2390

Extractor unit

with energy-efficient LED lighting and light-touch switches for easy use.

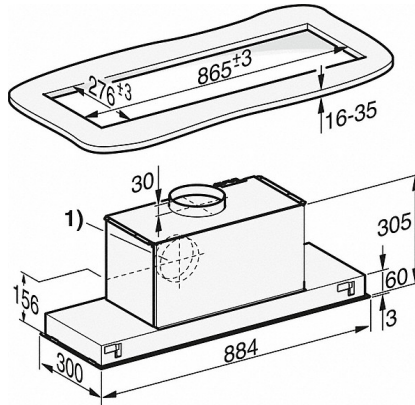

DA 2390 (Installation drawing)

1) Vent connection alternatively to rear