

DA 2698

Extractor unit

with energy-efficient LED lighting and light-touch switches for easy use.



- Customised kitchen design - fully integrated in 880mm width
- Unique user convenience – Con@ctivity
- Powerful - 640m<sup>3</sup>/h on the booster setting
- Energy-efficient and quiet - powerful ECO motor
- Elegant and efficient - edge extraction panels

EAN: 4002515935552 / article number: 28269855D / material number: 10751460

<b>Construction type</b>	
Integrated extractor	•
<b>Design</b>	
Colour	Stainless steel
Edge extraction	•
<b>Operating modes</b>	
Type of air guide	Convertible
Active charcoal filter (order separately)	DKF19-1
<b>User convenience</b>	
Electronic controls	•
Light-touch controls	•
Miele@mobile app	•
Power levels (number without Booster level)	3
Booster level	•
Programmable Booster level switch-off	•
Run-on time 5 / 15 min.	•
Grease filter saturation indicator programmable	•
Active charcoal filter saturation indicator programmable	•
<b>Cleaning convenience</b>	
CleanCover	•
<b>Efficiency and sustainability</b>	
Annual energy consumption in kWh/year	28,6
PowerManagement system	•
ECO package	•
<b>Appliance networking</b>	
Miele@home	•
WiFiConn@ct	•
MobileControl	•
ShopConn@ct	•
Automatic function Con@ctivity 3.0 (WiFi)	•
<b>Filter system</b>	
Number of dishwasher-safe stainless steel grease filters	2
<b>Lighting</b>	
LED	•
Number x W	4 x 3 W
Light intensity in Lx	650
Colour temperature in K	3.500
Dimmer function	•
<b>Fan</b>	
Dual-action fan	•
ECO motor (DC motor)	•

DA 2698

Extractor unit

with energy-efficient LED lighting and light-touch switches for easy use.




<b>Air throughput with max. duct diameter in extraction mode (not for external version)</b>	
Air throughput in Level 1 (m <sup>3</sup> /h)	200
Air throughput in Level 2 (m <sup>3</sup> /h)	300
Air throughput in Level 3 (m <sup>3</sup> /h)	400
Air throughput in Booster level (m <sup>3</sup> /h)	640
Sound power in Level 1 (dB(A) re 1 pW)	36
Sound power in Level 2 (dB(A) re 1 pW)	44
Sound power in Level 3 (dB(A) re 1 pW)	51
Sound power in Booster level (dB(A) re 1 pW)	62
Sound pressure in Level 1 (dB(A) re 20 µPa)	22
Sound pressure in Level 2 (dB(A) re 20 µPa)	30
Sound pressure in Level 3 (dB(A) re 20 µPa)	37
Sound pressure in Booster level (dB(A) re 20 µPa)	48
<b>Air throughput in recirculation mode</b>	
Air throughput in Level 1 (m <sup>3</sup> /h)	135
Air throughput in Level 2 (m <sup>3</sup> /h)	220
Air throughput in Level 3 (m <sup>3</sup> /h)	365
Air throughput in Booster level (m <sup>3</sup> /h)	535
Sound power in Level 1 (dB(A) re 1 pW)	47
Sound power in Level 2 (dB(A) re 1 pW)	55
Sound power in Level 3 (dB(A) re 1 pW)	62
Sound power in Booster level (dB(A) re 1 pW)	74
Sound pressure in Level 1 (dB(A) re 20 µPa)	32
Sound pressure in Level 2 (dB(A) re 20 µPa)	41
Sound pressure in Level 3 (dB(A) re 20 µPa)	48
Sound power in Booster level (dB(A) re 1 pW)	59
<b>Safety</b>	
Safety switch-off	•
<b>Technical data</b>	
Canopy width in mm	880
Canopy height in mm	64
Canopy depth in mm	293
Minimum height above electric hobs in mm	450
Minimum height above gas hobs (max. 12.6 kW total power, burner ≤ 4.5 kW) in mm	650
Net weight in kg	14,0
Length of supply lead in m	1,5
Standard plug fitted	•
Total rated load in kW	0,09
Voltage in V	230
Fuse rating in A	10
Frequency in Hz	50
Number of phases	1
<b>Installation notes</b>	
Extraction ducting connection at top	•
Extraction connection at top and rear	•
Diameter of extraction ducting connection in mm	150
<b>Standard accessories</b>	
Non-return flap	•

DA 2698

Extractor unit

with energy-efficient LED lighting and light-touch switches for easy use.

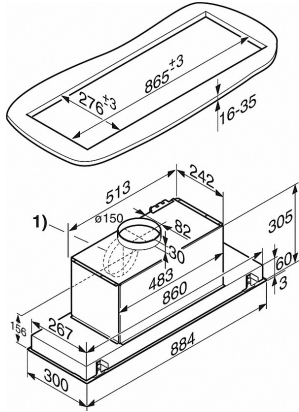

DA 2698 I- Integrated cooker hood (Installation drawing)

1) Vent connection alternatively to rear