

DA 3496

Slimline cooker hood
with energy-efficient LED lighting and light-touch switches for easy use.



- Elegant design - slim 895mm extractor canopy
- Powerful - 620m³/h on the booster setting
- Efficient filtration- 10-ply stainless-steel grease filter
- Safe and easy to clean - Miele CleanCover
- Suitable for every home - for extraction or recirculation

EAN: 4002515661239 / article number: 28349655SA / material number: 10249970

Construction type	
Slimline cooker hood	•
Design	
Colour	Stainless steel
Operating modes	
Type of air guide	Convertible
Active charcoal filter (order separately)	DKF13-1
User convenience	
Electronic controls	•
Light-touch controls	•
Power levels (number without Booster level)	3
Booster level	•
Programmable Booster level switch-off	•
Cleaning convenience	
Easy-to-clean canopy interior – CleanCover	•
Filter system	
Number of dishwasher safe stainless steel grease filters	2
Lighting	
LED	•
Number x W	2 x 3 W
Light intensity in Lx	300
Colour temperature in K	3.000
Fan	
Dual-action fan	•
AC motor	•
Air throughput with max. duct diameter in extraction mode (not for external version)	
Air throughput in Level 1 (m ³ /h)	160
Air throughput in Level 2 (m ³ /h)	310
Air throughput in Level 3 (m ³ /h)	450
Air throughput in Booster level (m ³ /h)	620
Sound power in Level 1 (dB(A) re 1 pW)	40
Sound power in Level 2 (dB(A) re 1 pW)	49
Sound power in Level 3 (dB(A) re 1 pW)	57
Sound power in Booster level (dB(A) re 1 pW)	66
Sound pressure in Level 1 (dB(A) re 20 µPa)	22
Sound pressure in Level 2 (dB(A) re 20 µPa)	31
Sound pressure in Level 3 (dB(A) re 20 µPa)	39
Sound pressure in Booster level (dB(A) re 20 µPa)	48

DA 3496


Slimline cooker hood
with energy-efficient LED lighting and light-touch switches for easy use.



Air throughput in recirculation mode	
Air throughput in Level 1 (m³/h)	130
Air throughput in Level 2 (m³/h)	230
Air throughput in Level 3 (m³/h)	360
Air throughput in Booster level (m³/h)	470
Sound power in Level 1 (dB(A) re 1 pW)	49
Sound power in Level 2 (dB(A) re 1 pW)	58
Sound power in Level 3 (dB(A) re 1 pW)	65
Sound power in Booster level (dB(A) re 1 pW)	71
Sound pressure in Level 1 (dB(A) re 20 µPa)	31
Sound pressure in Level 2 (dB(A) re 20 µPa)	40
Sound pressure in Level 3 (dB(A) re 20 µPa)	48
Sound power in Booster level (dB(A) re 1 pW)	53
Safety	
Safety switch-off	•
Technical data	
Canopy width in mm	895
Canopy height in mm	34
Canopy depth in mm	275
Minimum height above electric hobs in mm	450
Minimum height above gas hobs (max. 12.6 kW total power, burner ≤ 4.5 kW) in mm	650
Net weight in kg	14,0
Length of supply lead in m	1,5
Standard plug fitted	•
Total rated load in kW	0,21
Voltage in V	220
Fuse rating in A	13
Frequency in Hz	60
Number of phases	1
Installation notes	
Extraction ducting connection at top	•
Diameter of extraction ducting connection in mm	150
Standard accessories	
Non-return flap	•
Adapter to reduce ducting diameter from 150 mm to 125 mm Ø	•

DA 3496

Slimline cooker hood
with energy-efficient LED lighting and light-touch switches for easy use.

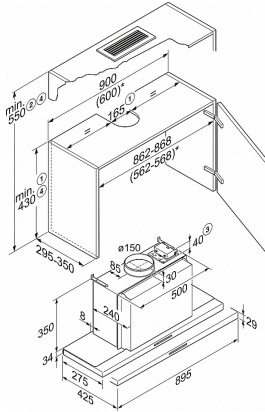

DA 3490, DA 3496 (installation drawing) VG AUS, VG CN, VG SA

1. Extraction mode: when measuring for height of the wall unit and the cut-out, account must be taken of any accessories fitted, e.g. silencer, DSM module.
 2. Recirculation mode: with conversion kit DUU 151
 3. Optional accessory: DSM 400
 4. Installation with kneeling frame DAR 3000: Please attend differing cabinet height (see installation drawing DAR 3000)
- * can also be installed in a 600 mm wide unit.