

## DA 4248 V D Puristic Varia

### Island cooker hood

with energy-efficient LED lighting and light-touch switches for easy use.



- Timeless design - 1.198mm wide stainless steel cooker hood
- Unique user convenience – Con@ctivity
- Always at the right height - motorised height adjustment
- Powerful - 675m<sup>3</sup>/h on the booster setting
- Pleasantly quiet – Miele Silence package

EAN: 4002515945506 / article number: 28424855D / material number: 10767370

<b>Construction type</b>	
Island cooker hood	•
<b>Design</b>	
Colour	Stainless steel
Customisation possible on request	•
Variable height available as customisation on request	•
<b>Operating modes</b>	
Type of air guide	air extraction
<b>User convenience</b>	
Electronic controls	•
Light-touch controls	•
Power levels (number without Booster level)	3
Booster level	•
Programmable Booster level switch-off	•
Run-on time 5 / 15 min.	•
Grease filter saturation indicator programmable	•
Silence package	•
Hood in Motion	•
<b>Cleaning convenience</b>	
CleanCover	•
<b>Efficiency and sustainability</b>	
Annual energy consumption in kWh/year	30,8
PowerManagement system	•
ECO package	•
<b>Appliance networking</b>	
Miele@home	•
WiFiConn@ct	•
MobileControl	•
Automatic function Con@ctivity 3.0 (WiFi)	•
<b>Filter system</b>	
Number of dishwasher safe stainless-steel grease filters (10-ply)	6
<b>Lighting</b>	
LED	•
Number x W	4 x 3 W
Light intensity in Lx	600
Colour temperature in K	3.500
Dimmer function	•
<b>Fan</b>	
Dual-action fan	•
ECO motor (DC motor)	•

DA 4248 V D Puristic Varia

Island cooker hood

with energy-efficient LED lighting and light-touch switches for easy use.




<b>Air throughput with max. duct diameter in extraction mode (not for external version)</b>	
Air throughput in Level 1 (m <sup>3</sup> /h)	180
Air throughput in Level 2 (m <sup>3</sup> /h)	290
Air throughput in Level 3 (m <sup>3</sup> /h)	420
Air throughput in Booster level (m <sup>3</sup> /h)	675
Sound power in Level 1 (dB(A) re 1 pW)	39
Sound power in Level 2 (dB(A) re 1 pW)	49
Sound power in Level 3 (dB(A) re 1 pW)	58
Sound power in Booster level (dB(A) re 1 pW)	70
Sound pressure in Level 1 (dB(A) re 20 µPa)	24
Sound pressure in Level 2 (dB(A) re 20 µPa)	34
Sound pressure in Level 3 (dB(A) re 20 µPa)	43
Sound pressure in Booster level (dB(A) re 20 µPa)	55
<b>Safety</b>	
Safety switch-off	•
<b>Technical data</b>	
Overall height for extraction mode and external mode cooker hoods in mm	755
Canopy width in mm	1.198
Canopy height in mm	70
Canopy depth in mm	698
Minimum height above electric hobs in mm	450
Minimum height above gas hobs (max. 12.6 kW total power, burner ≤ 4.5 kW) in mm	650
Net weight in kg	45,0
Hard-wired connection	•
Total rated load in kW	0,29
Voltage in V	230
Fuse rating in A	10
Frequency in Hz	50
Number of phases	1
<b>Installation notes</b>	
Extraction ducting connection at top	•
Diameter of extraction ducting connection in mm	150
Telescopic chimney	•
<b>Standard accessories</b>	
Non-return flap	•

DA 4248 V D Puristic Varia

Island cooker hood

with energy-efficient LED lighting and light-touch switches for easy use.

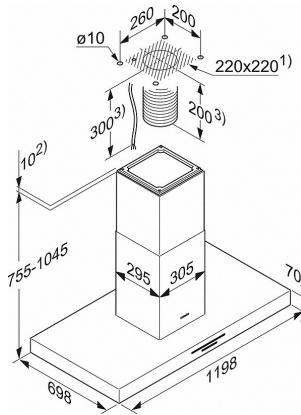

DA 4248 V (Installation drawing)

- 1) Installation area/site
- 2) Installation alternatively with spacer frame
- 3) A supply lead, and for vented mode flexible vent ducting, must be pre-fitted for the connection in the ceiling to the connection of the cooker hood.