

DA 6698 W Puristic Edition 6000

Wall mounted cooker hood
with energy-efficient LED lighting and touch controls for simple operation.



- Family design – based on Miele built-in appliances
- Unique user convenience – Con@ctivity
- Powerful - 640m³/h on the booster setting
- Energy-efficient and quiet - powerful ECO motor
- Pleasantly quiet – Miele Silence package

EAN: 4002515935996 / article number: 28669850D / material number: 10749650

Construction type	
Wall mounted cooker hood	•
Design	
Colour	Stainless steel
RAL colours available as customisation on request	•
Customisation possible on request	•
Variable height available as customisation on request	•
Operating modes	
Type of air guide	Convertible
Active charcoal filter (order separately)	DKF12-1
User convenience	
Electronic controls	•
Touch-on-glass controls	•
Miele@mobile app	•
Power levels (number without Booster level)	3
Booster level	•
Programmable Booster level switch-off	•
Run-on time 5 / 15 min.	•
Grease filter saturation indicator programmable	•
Active charcoal filter saturation indicator programmable	•
Silence package	•
Cleaning convenience	
CleanCover	•
Efficiency and sustainability	
Annual energy consumption in kWh/year	24,6
PowerManagement system	•
ECO package	•
Appliance networking	
Miele@home	•
WiFiConn@ct	•
MobileControl	•
ShopConn@ct	•
Automatic function Con@ctivity 3.0 (WiFi)	•
Filter system	
Number of dishwasher-safe stainless steel grease filters	3
Lighting	
LED	•
Number x W	3 x 3 W
Light intensity in Lx	670
Colour temperature in K	3.500
Dimmer function	•
Fan	
Dual-action fan	•
ECO motor (DC motor)	•

DA 6698 W Puristic Edition 6000

Wall mounted cooker hood
with energy-efficient LED lighting and touch controls for simple operation.



Air throughput with max. duct diameter in extraction mode (not for external version)	
Air throughput in Level 1 (m ³ /h)	200
Air throughput in Level 2 (m ³ /h)	300
Air throughput in Level 3 (m ³ /h)	400
Air throughput in Booster level (m ³ /h)	640
Sound power in Level 1 (dB(A) re 1 pW)	36
Sound power in Level 2 (dB(A) re 1 pW)	44
Sound power in Level 3 (dB(A) re 1 pW)	52
Sound power in Booster level (dB(A) re 1 pW)	63
Sound pressure in Level 1 (dB(A) re 20 µPa)	21
Sound pressure in Level 2 (dB(A) re 20 µPa)	29
Sound pressure in Level 3 (dB(A) re 20 µPa)	37
Sound pressure in Booster level (dB(A) re 20 µPa)	48
Air throughput in recirculation mode	
Air throughput in Level 1 (m ³ /h)	110
Air throughput in Level 2 (m ³ /h)	185
Air throughput in Level 3 (m ³ /h)	315
Air throughput in Booster level (m ³ /h)	460
Sound power in Level 1 (dB(A) re 1 pW)	45
Sound power in Level 2 (dB(A) re 1 pW)	53
Sound power in Level 3 (dB(A) re 1 pW)	63
Sound power in Booster level (dB(A) re 1 pW)	72
Sound pressure in Level 1 (dB(A) re 20 µPa)	30
Sound pressure in Level 2 (dB(A) re 20 µPa)	38
Sound pressure in Level 3 (dB(A) re 20 µPa)	48
Sound power in Booster level (dB(A) re 1 pW)	57
Safety	
Safety switch-off	•
Single pane tempered glass	•
Technical data	
Overall height for extraction mode and external mode cooker hoods in mm	710
Overall height for recirculation mode cooker hoods in mm	840
Canopy width in mm	898
Canopy height in mm	85
Canopy depth in mm	500
Minimum height above electric hobs in mm	450
Minimum height above gas hobs (max. 12.6 kW total power, burner ≤ 4.5 kW) in mm	650
Net weight in kg	26,0
Length of supply lead in m	1,5
Standard plug fitted	•
Total rated load in kW	0,09
Voltage in V	230
Fuse rating in A	10
Frequency in Hz	50
Number of phases	1

DA 6698 W Puristic Edition 6000


Wall mounted cooker hood
with energy-efficient LED lighting and touch controls for simple operation.



Installation notes	
Extraction ducting connection at top	•
Extraction connection at top and rear	•
Diameter of extraction ducting connection in mm	150
Telescopic chimney	•
Telescopic wall bracket	•
Standard accessories	
Non-return flap	•
Adapter to reduce ducting diameter from 150 mm to 125 mm Ø	•

DA 6698 W Puristic Edition 6000

Wall mounted cooker hood
with energy-efficient LED lighting and touch controls for simple operation.

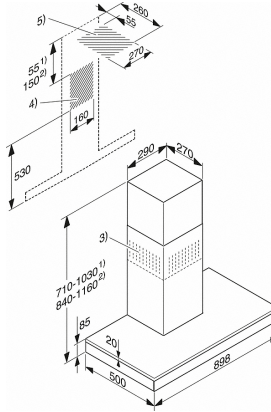

DA 6698 W, CLST (Installation drawing)

1. Extraction
2. Recirculation
- 3 Ventilation grilles at the top for recirculation
4. + 5. Vent cut-out positions (Area 5 not required for recirculation)