

KM 7564 FL

Induction hob with onset controls
with 4 PowerFlex cooking areas for maximum power output



- Intuitive quick selection via number sequences – Smart Select
- 4 cooking zones incl. 4 high-power PowerFlex cooking areas
- A width of 620mm for surface-mounted or flush-fit installation
- Seamlessly integrates with any SmartLine element
- Communication with the hood - automatic function Con@ctivity

EAN: 4002516138624 / article number: 26756470D / material number: 11022960

Heating type	
Heating type	Induction
Construction type	
Independent of cooker	•
Design	
Elegant glass ceramic surface	•
Ceramic surface colour	Black
Flush-fit installation	•
Surface-mounted installation	•
Can be combined with SmartLine	•
Can be combined with SmartLine downdraft extractor	•
Cooking zone details	
Number of cooking zones	4
Number of cooking areas	2
Maximum number of pans	4
PowerFlex cooking zone	
No.	4
Size in mm	Ø 150 – 230
Max. rating in W	2100
Max. Booster power rating in W	3000
Max. TwinBooster power rating in W	3650
Cooking zone	
Position	Left
Type	PowerFlex bridge
Size in mm	230x390
Max. rating in W	3400
Max. Booster power rating in W	4800
Max. TwinBooster power rating in W	7300
Position	right
Type	PowerFlex bridge
Size in mm	230x390
Max. rating in W	3400
Max. Booster power rating in W	4800
Max. TwinBooster power rating in W	7300
User convenience	
Operation via sensor controls	Smart Select
Display colour	Yellow
Permanent pan recognition	•
Pan and pan size recognition	•
Stop & Go function	•
Recall function	•
Minute minder	•
Safety switch-off	•
Auto heat-up	•
Keeping warm	•
Individual setting options (e.g. buzzers)	•
Appliance networking	
Miele@home	•
WiFiConn@ct	•
Automatic function Con@ctivity 3.0	•

KM 7564 FL


Induction hob with onset controls
with 4 PowerFlex cooking areas for maximum power output



Cleaning convenience	
Easy to clean ceramic glass	•
Wipe protection	•
Safety	
Safety switch-off	•
Lock function	•
System lock	•
Integrated cooling fan	•
Overheating protection	•
Residual heat indicator	•
Technical data	
Dimensions in mm (width)	620
Dimensions in mm (height)	51
Dimensions in mm (depth)	520
Casing height incl. connection box in mm	51
Cutout dimensions in mm (width) with surface-mounted installation	600
Cutout dimensions in mm (depth) with surface-mounted installation	500
Internal cutout dimensions in mm (width) with flush installation	600
Internal cutout dimensions in mm (depth) with flush installation	500
External cutout dimensions in mm (width) with flush installation	624
External cutout dimensions in mm (depth) with flush installation	524
Weight in kg	11
Total rated load in kW	7,300
Voltage in V	230
Frequency in Hz	50-60
Connection cable length in m	1,4
Standard accessories	
Mains cable	•


KM 7564 FL

Induction hob with onset controls
with 4 PowerFlex cooking areas for maximum power output

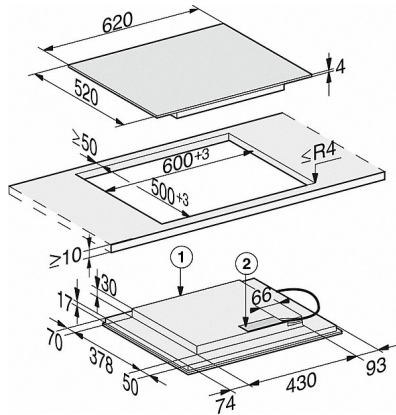

KM 6329, KM 7564 (installation drawing)

- 1) Front
- 2) Mains connection box with mains connection cable, L = 1440 mm

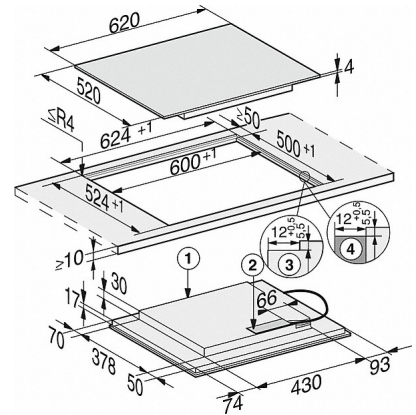

KM 6329, KM 7564 flush (installation drawing)

- 1) Front
- 2) Mains connection box with mains connection cable, L = 1440 mm
- 3) Stepped cut-out stone worktops
- 4) Wooden frame 12 mm (supplied loose)