

KM 7684 FL

Induction hob with onset controls

panorama design with two PowerFlex cooking areas for extra convenience.



- Intuitive quick selection via number sequences – Smart Select
- 4 cooking zones incl. 4 high-power PowerFlex cooking areas
- A width of 916mm for surface-mounted or flush-fit installation
- Shortest heating-up times - TwinBooster
- Communication with the hood - automatic function Con@ctivity

EAN: 4002516164821 / article number: 26768470D / material number: 11145160

Heating type	
Heating type	Induction
Construction type	
Independent of cooker	•
Design	
Elegant glass ceramic surface	•
Ceramic surface colour	Black
Flush-fit installation	•
Surface-mounted installation	•
Cooking zone details	
Number of cooking zones	4
Number of cooking areas	2
Maximum number of pans	4
PowerFlex cooking zone	
No.	4
Size in mm	150x230
Max. rating in W	2.100
Max. Booster power rating in W	3.000
Max. TwinBooster power rating in W	3650
Cooking zone	
Position	Left
Type	PowerFlex bridge
Size in mm	230x390
Max. rating in W	3400
Max. Booster power rating in W	4800
Max. TwinBooster power rating in W	7300
Position	right
Type	PowerFlex bridge
Size in mm	230x390
Max. rating in W	3400
Max. Booster power rating in W	4800
Max. TwinBooster power rating in W	7300
User convenience	
Operation via sensor controls	Smart Select
Display colour	Yellow
Permanent pan recognition	•
Pan and pan size recognition	•
Stop & Go function	•
Recall function	•
Minute minder	•
Safety switch-off	•
Auto heat-up	•
Keeping warm	•
Individual setting options (e.g. buzzers)	•
Appliance networking	
Miele@home	•
WiFiConn@ct	•
Automatic function Con@ctivity 3.0	•

KM 7684 FL

Induction hob with onset controls

panorama design with two PowerFlex cooking areas for extra convenience.




Cleaning convenience	
Easy to clean ceramic glass	•
Wipe protection	•
Safety	
Safety switch-off	•
Lock function	•
System lock	•
Integrated cooling fan	•
Overheating protection	•
Residual heat indicator	•
Technical data	
Dimensions in mm (width)	916
Dimensions in mm (height)	51
Dimensions in mm (depth)	408
Casing height incl. connection box in mm	51
Cutout dimensions in mm (width) with surface-mounted installation	896
Cutout dimensions in mm (depth) with surface-mounted installation	388
Internal cutout dimensions in mm (width) with flush installation	896
Internal cutout dimensions in mm (depth) with flush installation	388
External cutout dimensions in mm (width) with flush installation	920
External cutout dimensions in mm (depth) with flush installation	412
Weight in kg	12
Total rated load in kW	7,300
Voltage in V	230
Frequency in Hz	50-60
Connection cable length in m	1,4
Standard accessories	
Mains cable	•

KM 7684 FL


Induction hob with onset controls

panorama design with two PowerFlex cooking areas for extra convenience.

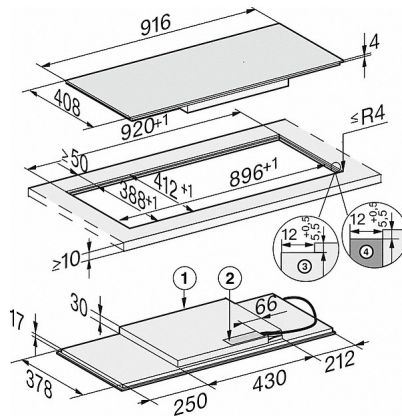

KM 7684 FL - flush (installation drawings)

- 1) Front
- 2) Mains connection box with mains connection cable, L = 1440 mm, are enclosed loosely
- 3) Stepped cut-out natural stone worktop
- 4) Wood support 12 mm (not supplied)

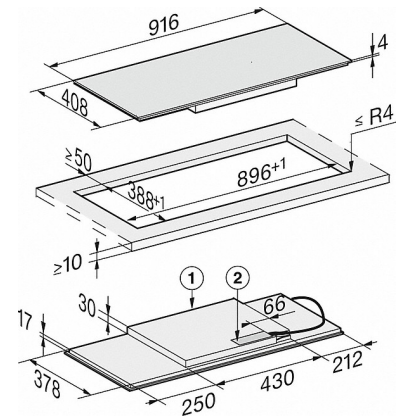

KM 7684 FL - onset installation (installation drawings)

- 1) Front
- 2) Mains connection box with mains connection cable, L = 1440 mm